



Crown Triton™ Series Motors

TEFC : Cast Iron Frame



- Premium Efficiency
- Meets or Exceeds EISA 2007 Requirements
Defined in NEMA MG1 Table 12-12 as NEMA
Premium™
- 3 Year Warranty



Experience Combined with Technology

Hyundai Induction Motors use Finite Element Analysis (FEA) and Computer Aided Design (CAD) methods to develop and produce the most innovative motors from state-of-the-art and fully automated manufacturing facilities.

Hyundai's Crown Triton™ cast iron frames greatly improve motor performance by maximizing heat dissipation.

The use of advanced technology to design and manufacture electric motors results in a reasonably priced top quality motor with superior performance characteristics.



Approvals : CSA C US, EEV mark, CE, Class I Division 2 (CSA only), C-UL

Crown Triton™ Series - Premium Efficiency Motors

Product Range

- Frame size : 143T to 449TZ
- Horsepower : 1 HP to 250 HP
- Poles : 2, 4, 6 pole
- Enclosure : TEFC, rigid cast iron construction

Typical Features & Construction

- AC 3 phase, squirrel cage induction motor
- Totally Enclosed Fan Cooled
- Premium efficiency meets or exceeds EISA 2007 requirements, as defined in NEMA MG1 table 12-12, NEMA premium™
- NEMA design B torque
- NEMA MG.1, EEMAC M1-6, CSA C390
- 60 Hz, 208-230/460 V and 575 V (Single voltage only for 150 HP & above)
- Class F insulation with Class B temperature rise
- Dual rated service factors 1.15 at 40°C ambient and 1.0 at 65°C ambient
- Continuous duty
- Supply voltage $\pm 10\%$, frequency $\pm 5\%$
- Wye-delta start capability from 15 HP (254T) to 250 HP (449T)
- Star internal connection for 575 V motors
- Part winding start capability at low voltage from 1 HP to 125 HP
- Inverter ready for 10:1 CT and 20:1 VT (NEMA MGI. Part 30)
- Bidirectional rotation
- Quiet running : Minimizing noise and vibration
- Low temperature bearing grease (Mobil polyrex EM grease) allows ambient temperature from -35°C to +50°C
- Altitude below 3,300 feet (1,000 meters)
- Rigid cast iron construction
- F-1 mounting (F-2 field modifiable)
- Oversized gasketed conduit box
- Oversized vacuum degassed bearings
- Corrosion resistant zinc plated hardware
- Corrosion resistant polyurethane paint
- Drive end shaft slinger or V-ring
- Stainless steel name plate
- Low temperature rise design will allow rating above 40°C ambient and altitudes above 3,300 feet at 1.0 service factor
- Fully tested and documented per IEEE Std. 112, method B and CSA C390
- EEV mark and CC No. on nameplate
- CSA for Class I , Division 2, Group A, B, C, D, temperature code T3 available
- C-face and D-flange kits available



Frames 143T-286T



Frames 324T-326T



Frames 364T-449TZ

Use of Improved and Optimized Materials to Achieve Better Features & Performance

- High grade, low loss, insulated electro-magnetic steel laminations are punched and core loss is controlled for maximum efficiency.
- Heavy enamel coated copper windings with precise winding process ensure consistent motor performance and extended insulation life.
- Superior Class F non-hygroscopic insulation system, multidipped and baked with Class H insulation varnish.
- Clearly numbered leads make connection easy.
- Die cast rotor of high conductivity aluminum eliminates variations in bar & end ring resistance. This assures consistent motor performance.
- Dynamically balanced rotor with half key ensures smooth operation, exceeding standard NEMA vibration requirements.
- Rotor surface is coated with corrosion resistant paint for outstanding resistance to severe environments.
- Drive end shaft slinger or V-ring protects bearing system against contaminants.
- Oversized gasketed conduit box exceeding CSA, NEMA & NEC minimum volumes is diagonally split and fully rotatable at 90° increments.
- Non-sparking, corrosion resistant external polypropylene fan assures maximum cooling and quieter operation.
- Removable plastic drain plugs to allow condensation to drain from the motor.
- Corrosion resistant polyurethane paint and corrosion resistant zinc plated hardware protect motors against severe environments.

Optional Features

- Cast iron fan guards
- Special voltages
- Two speed motors
- Special shaft designs and materials
- Space heaters
- Encoders
- Rotating labyrinth seal (ProTECH™)
- Auxiliary conduit boxes
- Drip canopies for vertical applications
- Thermistors
- Thermostats
- Constant speed blowers


TEFC, Crown Triton™ Series - Premium Efficiency Motors


- Cast iron construction
- Meets or exceeds EISA2007 requirements
- Class F insulation with Class B temp. rise, 1.15 S.F.
- Diagonally split, gasketed conduit box, fully rotatable at 90° increments
- C-face and D-flange kits available

(Unit : inch)

Frame Size	Overall							Shaft			Mounting			Conduit Box		Fig.
	BA	C	D	O	P	U	N-W	Keyway			2E	2F1	2F2	AA	AB	
								R	ES	S						
143T	2.25	12.88	3.50	7.44	7.44	0.875	2.25	0.771	1.41	0.188	5.50	[5.00]	4.00	0.75	6.46	A
145T	2.25	12.88	3.50	7.44	7.44	0.875	2.25	0.771	1.41	0.188	5.50	5.00	[4.00]	0.75	6.46	
182T	2.75	14.69	4.50	9.45	9.89	1.125	2.75	0.986	1.78	0.250	7.50	4.50	-	0.75	7.40	
184T	2.75	15.69	4.50	9.45	9.89	1.125	2.75	0.986	1.78	0.250	7.50	5.50	-	0.75	7.40	
213T	3.50	18.33	5.25	11.00	11.50	1.375	3.38	1.201	2.41	0.312	8.50	5.50	-	1.00	8.59	
215T	3.50	19.83	5.25	11.00	11.50	1.375	3.38	1.201	2.41	0.312	8.50	7.00	-	1.00	8.59	
254T	4.25	23.13	6.25	12.75	12.76	1.625	4.00	1.416	2.91	0.375	10.00	8.25	-	1.25	11.88	
256T	4.25	24.86	6.25	12.75	12.76	1.625	4.00	1.416	2.91	0.375	10.00	10.00	-	1.25	11.88	
284TS	4.75	24.76	7.00	14.28	14.19	1.625	3.25	1.416	1.91	0.375	11.00	9.50	-	1.50	12.43	
284T	4.75	26.13	7.00	14.28	14.19	1.875	4.62	1.591	3.28	0.500	11.00	9.50	-	1.50	12.43	
286TS	4.75	26.34	7.00	14.28	14.19	1.625	3.25	1.416	1.91	0.375	11.00	11.00	-	1.50	12.43	
286T	4.75	27.71	7.00	14.28	14.19	1.875	4.62	1.591	3.28	0.500	11.00	11.00	-	1.50	12.43	
324TS	5.25	29.59	8.00	16.06	15.98	1.875	3.75	1.591	2.03	0.500	12.50	[12.00]	10.50	2.00	15.31	
324T	5.25	31.09	8.00	16.06	15.98	2.125	5.25	1.845	3.91	0.500	12.50	[12.00]	10.50	2.00	15.31	
326TS	5.25	29.59	8.00	16.06	15.98	1.875	3.75	1.591	2.03	0.500	12.50	12.00	[10.50]	2.00	15.31	
326T	5.25	31.09	8.00	16.06	15.98	2.125	5.25	1.845	3.91	0.500	12.50	12.00	[10.50]	2.00	15.31	
326T(L)	5.25	33.04	8.00	16.06	15.98	2.125	5.25	1.845	3.91	0.500	12.50	12.00	[10.50]	2.00	15.31	
364TS	5.88	31.88	9.00	18.50	18.23	1.875	3.75	1.591	2.03	0.500	14.00	[12.25]	11.25	3.00	17.13	
364T	5.88	34.01	9.00	18.50	18.23	2.375	5.88	2.021	4.28	0.625	14.00	[12.25]	11.25	3.00	17.13	
365TS	5.88	31.88	9.00	18.50	18.23	1.875	3.75	1.591	2.03	0.500	14.00	12.25	[11.25]	3.00	17.13	
365T	5.88	34.01	9.00	18.50	18.23	2.375	5.88	2.021	4.28	0.625	14.00	12.25	[11.25]	3.00	17.13	
404T	6.62	39.42	10.00	20.79	20.16	2.875	7.25	2.450	5.65	0.750	16.00	[13.75]	12.25	3.00	20.28	
405TS	6.62	36.42	10.00	20.79	20.16	2.125	4.25	1.845	2.80	0.500	16.00	13.75	[12.25]	3.00	20.28	
405T	6.62	39.42	10.00	20.79	20.16	2.875	7.25	2.450	5.65	0.750	16.00	13.75	[12.25]	3.00	20.28	
444TS	7.50	41.46	11.00	23.19	22.40	2.375	4.75	2.021	3.03	0.625	18.00	[16.50]	14.50	3.00	21.26	
444T	7.50	45.21	11.00	23.19	22.40	3.375	8.50	2.880	6.93	0.875	18.00	[16.50]	14.50	3.00	21.26	
445TS	7.50	41.46	11.00	23.19	22.40	2.375	4.75	2.021	3.03	0.625	18.00	16.50	[14.50]	3.00	21.26	
445T	7.50	45.21	11.00	23.19	22.40	3.375	8.50	2.880	6.93	0.875	18.00	16.50	[14.50]	3.00	21.26	
447TS	7.50	44.96	11.00	23.19	22.40	2.375	4.75	2.021	3.03	0.625	18.00	20.00	[17.99]	3.00	21.26	
447T	7.50	48.71	11.00	23.19	22.40	3.375	8.50	2.880	6.93	0.875	18.00	20.00	[17.99]	3.00	21.26	
447TZ	7.50	50.34	11.00	23.19	22.40	3.375	10.125	2.880	8.50	0.875	18.00	20.00	[17.99]	3.00	21.26	
449TS	7.50	50.08	11.00	23.19	22.40	2.375	4.75	2.021	3.03	0.625	18.00	25.00	[20.00]	3.00	21.26	
449T	7.50	53.83	11.00	23.19	22.40	3.375	8.50	2.880	6.93	0.875	18.00	25.00	[20.00]	3.00	21.26	
449TZ	7.50	55.46	11.00	23.19	22.40	3.375	10.125	2.880	8.50	0.875	18.00	25.00	[20.00]	3.00	21.26	

Note: 1. Dimension "D" Tolerance : 140T-360T : +0.00, -0.03
 400T-440T : +0.00, -0.06
 2. Dimension "U" Tolerance : Up to 1.500 Dia. : +0.000, -0.0005
 1.625 Dia. & Larger : +0.000, -0.001

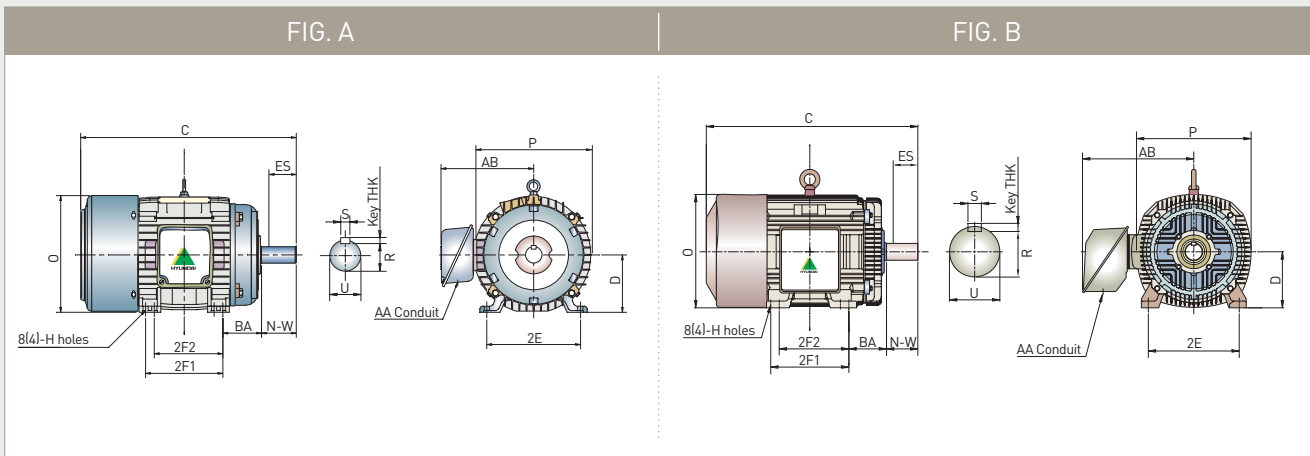



Performance Data

TEFC, Crown Triton™ Series - Premium Efficiency Motors

3-phase, 60 Hz, 230/460 V (usable on 208 V) , 575 V, 1.15 S.F., continuous duty

NEMA design B, Class F, 40°C amb.

Rated Output (HP)	Pole	Frame Size	Characteristics at Rated Output						Locked Rotor Current		Torque			Moment of Inertia WK ² (lb.ft ²)	NEMA Code Letter	Approx. Weight (lbs)
			Full Load Speed (RPM)	Efficiency		Power Factor	Full Load Current		@ 460 V (A)	@ 575 V (A)	Full Load (lb.ft)	Locked Rotor (% FLT)	Break-down (% FLT)			
				Full Load Nom. (%)	3/4 Load (%)		Full Load (p.u.)	@ 460 V (A)								
1	2	143T	3500	77.00	77.20	0.820	1.5	1.2	14.9	11.9	1.5	200	270	0.031	N	53
	4	143T	1740	85.50	85.60	0.700	1.6	1.3	14.6	11.7	3.0	280	310	0.059	N	53
	6	145T	1140	82.50	82.70	0.650	1.8	1.4	14.0	11.2	4.6	180	275	0.083	N	55
1.5	2	143T	3500	84.00	84.20	0.840	2.0	1.6	19.6	15.7	2.2	185	260	0.033	M	53
	4	145T	1735	86.50	86.70	0.720	2.2	1.8	20.0	16.0	4.5	260	290	0.076	M	55
	6	182T	1160	87.50	87.70	0.680	2.3	1.9	19.7	15.8	6.7	190	270	0.593	L	90
2	2	145T	3500	85.50	85.70	0.850	2.6	2.1	24.6	19.7	3.0	180	250	0.042	L	55
	4	145T	1735	86.50	86.70	0.730	3.0	2.4	24.7	19.8	6.1	245	280	0.078	L	55
	6	184T	1155	88.50	88.70	0.700	3.0	2.4	24.0	19.2	9.1	180	260	0.712	L	105
3	2	182T	3515	86.50	86.70	0.850	3.8	3.0	28.5	22.8	4.4	190	260	0.071	J	90
	4	182T	1760	89.50	89.60	0.790	3.9	3.1	30.1	24.1	8.8	220	280	0.190	J	90
	6	213T	1175	89.50	89.50	0.680	4.5	3.6	32.7	26.1	13.2	180	250	0.949	K	150
5	2	184T	3515	88.50	88.70	0.860	6.1	4.9	45.8	36.6	7.4	190	260	0.166	J	105
	4	184T	1760	89.50	89.70	0.800	6.5	5.2	49.3	39.4	14.8	210	260	0.309	J	105
	6	215T	1170	89.50	89.50	0.700	7.4	5.9	50.4	40.3	22.3	170	220	1.234	K	165
7.5	2	213T	3520	89.50	89.70	0.860	9.0	7.2	62.8	50.2	11.0	160	260	0.332	H	150
	4	213T	1760	91.70	91.70	0.790	9.5	7.6	73.4	58.7	22.0	190	250	0.570	J	150
	6	254T	1175	91.00	91.10	0.740	10.3	8.2	69.7	55.8	33.0	170	250	2.136	J	260
10	2	215T	3525	90.20	90.30	0.870	12.0	9.6	81.6	65.3	15.0	160	260	0.451	H	165
	4	215T	1760	91.70	91.70	0.805	12.8	10.2	95.6	76.5	30.0	180	240	0.712	J	165
	6	256T	1175	91.00	91.10	0.750	13.8	11.0	93.8	75.0	45.0	170	250	3.086	J	300
15	2	254T	3535	91.70	91.70	0.890	16.9	13.5	113.3	90.7	21.9	180	250	0.926	G	260
	4	254T	1775	92.40	92.40	0.815	18.3	14.7	124.7	99.7	43.7	200	240	2.136	H	260
	6	284T	1175	91.70	91.80	0.760	19.8	15.8	132.7	106.2	66.0	160	240	4.984	H	360
20	2	256T	3535	91.70	91.70	0.890	23.1	18.5	149.9	120.0	29.9	180	250	1.163	G	300
	4	256T	1775	93.00	93.00	0.815	24.8	19.9	168.9	135.1	59.5	200	240	2.635	H	300
	6	286T	1175	91.70	91.80	0.770	26.7	21.3	176.0	140.8	89.9	150	230	6.100	H	390
25	2	284TS	3560	91.70	91.70	0.890	28.5	22.8	199.2	159.3	36.6	160	230	1.899	H	380
	4	284T	1775	93.60	93.80	0.820	30.3	24.2	205.7	164.6	73.4	170	220	3.940	H	380
	6	324T	1175	93.00	93.20	0.800	31.2	25.0	212.2	169.8	110.9	160	220	8.094	H	550
30	2	286TS	3560	91.70	91.70	0.890	33.8	27.1	236.8	189.5	43.5	160	230	2.089	G	410
	4	286T	1775	93.60	93.80	0.820	36.0	28.8	244.6	195.7	87.3	170	220	5.578	H	410
	6	326T	1175	93.00	93.20	0.800	37.1	29.7	252.4	201.9	131.9	160	220	10.443	H	560
40	2	324TS	3560	92.40	92.60	0.895	45.5	36.4	296.0	236.8	59.4	160	230	3.987	G	550
	4	324T	1780	94.10	94.10	0.820	48.8	39.0	341.6	273.3	118.7	160	220	7.121	H	550
	6	364T	1185	94.10	94.30	0.820	48.8	39.0	331.8	265.5	178.4	150	220	26.650	H	780
50	2	326TS	3560	93.00	93.20	0.895	55.8	44.6	368.2	294.6	73.2	160	230	4.272	G	560
	4	326T	1780	94.50	94.50	0.820	59.9	47.9	419.5	335.6	146.4	160	220	8.307	H	560
	6	365T	1185	94.10	94.30	0.820	60.2	48.1	409.3	327.4	220.0	150	220	32.000	H	840
60	2	364TS	3570	94.10	94.10	0.915	65.6	52.5	446.1	356.8	88.8	140	220	9.280	G	780
	4	364T	1780	95.00	95.10	0.850	69.9	56.0	468.6	374.9	178.1	150	220	17.640	G	780
	6	404T	1185	94.50	94.70	0.840	71.2	56.9	476.7	381.4	267.5	140	220	46.280	G	1120
75	2	365TS	3570	94.50	94.50	0.915	79.8	63.9	542.9	434.3	108.5	140	220	11.040	G	820
	4	365T	1780	95.40	95.50	0.850	85.1	68.1	587.4	469.9	217.7	150	220	20.900	G	820
	6	405T	1185	94.50	94.70	0.840	87.0	69.6	591.3	473.1	327.0	140	220	55.310	G	1220
100	2	405TS	3570	94.50	94.50	0.905	110.1	88.1	770.5	616.4	148.0	120	220	18.450	G	1110
	4	405T	1780	95.40	95.40	0.865	114.1	91.3	741.5	593.2	296.8	140	220	35.910	G	1110
	6	444T	1185	95.00	95.20	0.850	116.6	93.3	792.7	634.2	445.9	140	220	73.410	G	1530
125	2	444TS	3570	95.00	95.00	0.900	139.5	111.6	976.2	781.0	187.5	120	220	27.420	G	1610
	4	444T	1785	95.40	95.50	0.880	142.0	113.6	994.2	795.4	375.0	140	220	52.510	G	1530
	6	445T	1185	95.00	95.20	0.850	147.7	118.1	996.7	797.4	564.8	140	220	89.860	G	1700
150	2	445TS	3570	95.00	95.00	0.900	161.5	129.2	1130.3	904.3	217.1	120	220	33.660	G	1770
	4	445T	1785	95.80	95.90	0.880	163.8	131.0	1146.4	917.1	434.2	140	220	67.430	G	1640
	6	447T	1185	95.80	96.00	0.850	169.5	135.6	1152.9	922.3	654.0	140	220	106.310	G	1970
200	2	447TS	3570	95.40	95.40	0.900	219.3	175.4	1534.9	1227.9	296.0	120	220	44.130	G	1900
	4	447T	1785	96.20	96.30	0.880	222.4	177.9	1556.7	1245.4	592.0	140	220	73.030	G	1860
	6	449T	1185	95.80	96.00	0.850	231.2	185.0	1572.2	1257.7	891.8	140	220	153.550	G	2430
250	2	449TS	3570	95.80	95.80	0.900	276.6	221.3	1936.1	1548.9	375.0	120	220	58.330	G	2430
	4	449T	1785	96.20	96.30	0.880	281.7	225.4	1971.9	1577.5	749.9	140	220	105.370	G	2430

Note: 1. The above data are average expected values.
 2. Actual minimum efficiencies can be certified by direct measurement based on ANSI/IEEE-112 test method B and CSA C 390.
 3. Technical data are subject to change without notice.

United States Motor Representative WorldWide Electric Corporation


● Warehouse Locations

Allentown, PA / Atlanta, GA / Dallas, TX / Indianapolis, IN / Kansas City, KS
Los Angeles, CA / Miami, FL / Rochester, NY

* Available For Pick-Up Or Delivery 24 Hours A Day - 7 Days A Week

● Sales Offices

Rochester, NY / Atlanta, GA / Birmingham, AL / Boston, MA / Cape Girardeau, MO / Chicago, IL
Dallas, TX / Denver, CO / Indianapolis, IN / Los Angeles, CA / Memphis, TN / Portland, OR / Tulsa, OK

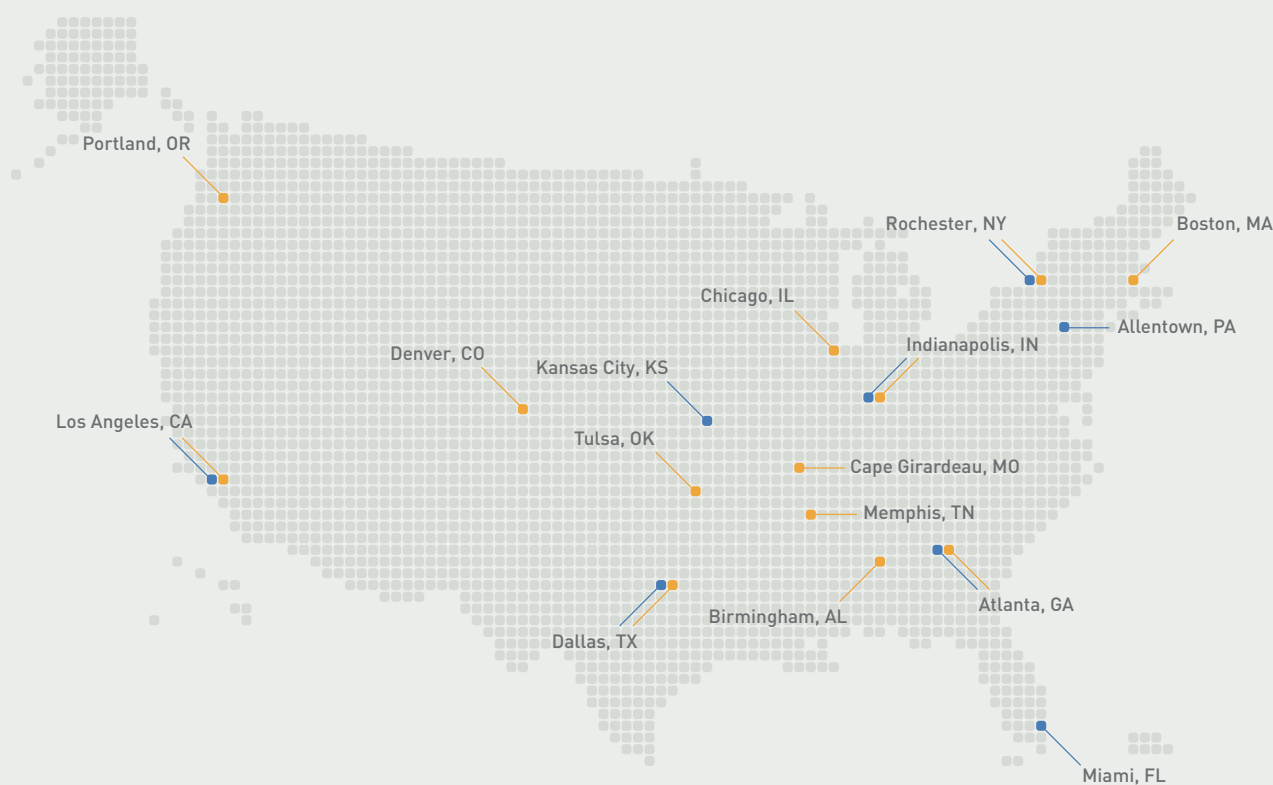

WorldWide Electric Corporation

P.O. Box 307, Pittsford, NY 14534 USA
Tel: 800-808-2131
Fax: 800-711-1616
www.worldwideelectric.net



ELECTRO ELECTRIC SYSTEMS

Head Office 1, Jeonha-dong, Dong-gu, Ulsan, Korea
Tel: 82-52-202-8527~8, 8681~2 Fax: 82-52-202-8520

Seoul (Sales & Marketing) 140-2, Gye-dong, Jongno-gu, Seoul, Korea
Tel: 82-2-746-7515, 7627 Fax: 82-2-746-7679