

GRUNDFOS VERSAFLO® UP(S)



THE QUIET REVOLUTION

Grundfos VersaFlo® UP(S) Wet Rotor Circulators

BE > THINK > INNOVATE >

GRUNDFOS 

THE QUIET REVOLUTION

Grundfos Pumps is the only manufacturer of large, wet-rotor circulators in the U.S. commercial market with a proven track record of more than 25 years experience. Our VersaFlo® UP(S) wet rotor circulators are whisper-quiet and maintenance-free. They feature an integrated pump and motor design. Fewer parts means greater ease of installation and durability.

QUIET OPERATION

Fans are often a source of noise and vibrations that can resonate throughout a building via pipe work. Wet rotor design eliminates the need for a fan to cool the motor: water being pumped surrounds the rotor, cooling and lubricating the shaft and bearings. No noise. Just quiet.

MAINTENANCE-FREE

The Grundfos VersaFlo® UP(S) wet rotor circulators are virtually maintenance-free and offer many advantages over three-piece, dry rotor pumps.


- No seals - eliminates hot water leakage
- No oil - pumped water is the lubricant
- No couplers - ensures no maintenance required

INCREASED OPERATING EFFICIENCY

The VersaFlo® UP(S) uses dynamically balanced rotors and laser-welded, stainless steel, curved blade impellers. Stainless steel impellers provide a higher pump efficiency than cast-bronze or cast-iron impellers.

ENERGY AND COST SAVINGS

The speed switch on the VersaFlo® UPS motor allows you to adjust the pump speed to meet the needs of your system, thereby reducing energy consumption and saving you money.

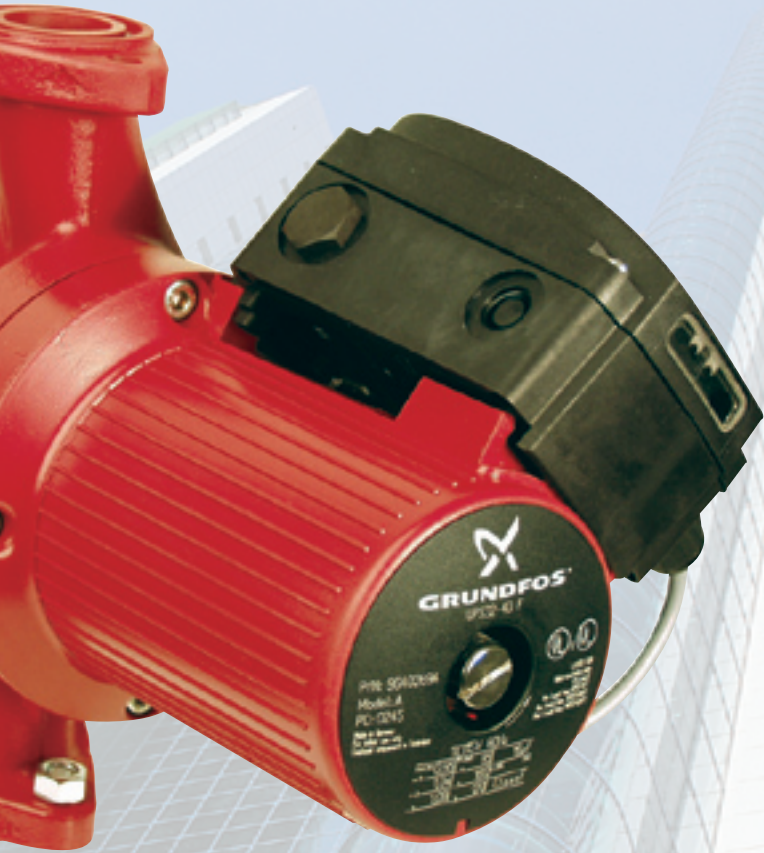

PUMP APPLICATIONS

VersaFlo® UP(S) pumps are available in varying sizes and material construction ideal for commercial buildings and large residences.

- › Cast iron for closed systems (heating and air conditioning)
- › Bronze for open systems (domestic hot water)
- › Heating systems for apartments, colleges, and hospitals
- › Hot water recirculation for apartments and hotels
- › Snow melt, and hot water recirculation for large residential and light commercial
- › Radiant heating for residential and commercial structures

REPLACEMENT VALUE

Most VersaFlo® UP(S) pumps can replace other manufacturers' three-piece dry runners without piping modifications – and occupy less space. For more information about VersaFlo® UP(S) pumps, contact your Grundfos representative or visit www.versaflo.com.

BUILT TO LAST

The stainless steel impellers, rotor shaft, bearing plate, and rotor cladding on VersaFlo® UP(S) pumps are corrosion-resistant and built to last.

USER-FRIENDLY

You can ensure that the electrical connections and rotation of your pump are correct by checking the indicator lights on the terminal box.

CASE STUDY: VERSAFLO® IN THE FIELD

CONCEPT MECHANICAL • AVON, COLORADO

“Our customers want absolute, unerring reliability and performance to match that of a finely-crafted European car,” says Tim Rosen, P.E., one of Concept Mechanical’s owners. “And, they don’t want to see or hear the mechanical equipment, not even in a garage or basement.”

To meet these needs, Concept Mechanical has developed a hydronic recipe for demanding clients that always includes Grundfos multi-speed circulators.

One recent job involved the installation of an extensive radiant heat system with a snow-melted driveway and several of the VersaFlo® circulators.

“Our customers are willing to pay for good workman-ship, but they want absolutely no compromise,” Tim said. “Using the best equipment isn’t necessarily a matter of choice, but of necessity. We use the best products because our reputation, and their peace of mind, are on the line.”

For jobs with larger loads, Concept Mechanical selects Grundfos VersaFlo® pumps for their three-speed adaptability and remarkably quiet operation.

They particularly like the ability to match a multi-speed pump to its need. Grundfos’ new, expanded line of wet rotor VersaFlo® pumps have two or three different performance curves and are well suited for later system retrofits or changes.

Go to www.versaflo.com for more case studies, application information, and performance ranges of VersaFlo® pumps.



Industry standard 2- or 4-bolt flanges with guage taps

Stainless steel neck ring to reduce recirculation and increase efficiency

Durable tungsten carbide motor bearings lubricated by media

Stainless steel shaft

Dynamically balanced rotor encapsulated in stainless steel


Stainless steel impeller and bearing plate for corrosion resistance and maximum efficiency

Cast-iron or bronze pump housing

Stator with built-in thermal overload switch

Drop-In Replacement

Port-to-port length matches competitors' three-piece models

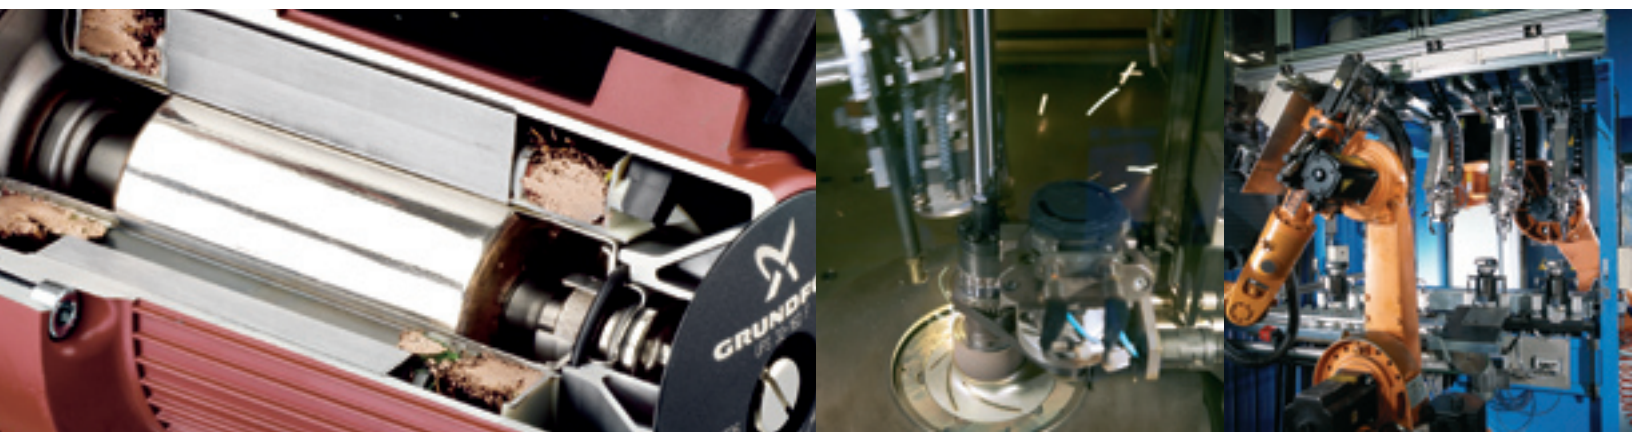

THE QUIET REVOLUTION IN PUMP SOLUTIONS



Self-venting pump

Terminal Box

- › Multiple-speed switch for optimum performance and energy savings
- › Fiber optic indicator lights for visual inspection of operation (On/Off), rotation, and troubleshooting

Add-On Modules (More for Less!)

Increase the versatility of your pump and reduce the need for and cost of buying additional pumps

- › Protection Module – enables direct connection to the mains switch (standard on single-phase motors)
- › Relay Module – features direct connection to mains switch, signals output for external operating or fault indications, and operates two pumps in parallel (duty, standby, and 24-hour alternating operation)

Inspection screw

- › Operates at less than 40 db
- › Suitable for variable frequency drive applications (3-phase only)
- › Built-in dimensions to match installed base - no need for piping modifications
- › No risk of touching electrically hot windings or rotating parts
- › Both pump AND motor designed and manufactured by one company - Grundfos
- › Saves energy - pump can be set to required speed rather than running at maximum
- › Pump runs quietly and with no noise - what a revolution!

Manufacturer	Model	Port to Port Length	Flange Size	Grundfos Model	Port to Port Length	Flange Size
B&G	2-1/2"	10"	2-1/2"	UP53-45F ¹	9-7/8"	2"-2.5-3"
	LD3	10"	3"	UP53-45F ¹	9-7/8"	2"-2.5-3"
	HD3	10"	3"	UP53-46F ¹	9-7/8"	2"-2.5-3"
	PD-35	12"	3"	UPS53-55/57F ¹	11-7/8"	2"-2.5-3"
	PD-37	12"	3"	UPS53-55/57F ¹	11-7/8"	2"-2.5-3"
	PD-38	14-1/2"	3"	UPS75-69F ¹	14"	2"-2.5-3"
	PD-40	14-1/2"	3"	UPS50-160/2 ^{1,2}	14"	2"
	601	11"	1"	UPS32-80/2 ¹	11"	3/4" to 1-1/2"
	602	11"	1"	UPS32-80/2 ¹	11"	3/4" to 1-1/2"
	603	11"	1"	UPS50-80/2 ^{1,2}	11-1/2"	2"
	604	11"	1-1/4"	UPS32-80/2 ¹	11"	3/4" to 1-1/2"
	609	11-1/2"	1-1/2"	UPS40-160/2 ¹	11-1/2"	1-1/2"
	610	11-1/2"	2"	UPS50-80/4 ¹	11-1/2"	2"
	621	13-1/2"	2"	UPS40-80/4	13-1/2"	1-1/2"
	614	13-1/2"	1-1/2"	UPS40-240/2	13-1/2"	1-1/2"
	615	13-1/2"	2"	UPS50-160/2	14"	2"
	616	13-1/2"	2"	UPS50-160/2	14"	2"
	622	13-1/2"	1-1/2"	UPS32-160/2	13-1/2"	1-1/2"
	623	13-1/2"	1-1/2"	UPS40-240/2	13-1/2"	1-1/2"
	617	13-1/2"	1-1/2"	UPS40-240/2	13-1/2"	1-1/2"
	624	14"	2"	UPS50-160/2	14"	2"
	625	14"	2"	UPS50-240/2	14"	2"
	60-11	11"	1-1/4"	UPS32-80/2 ¹	11"	3/4" to 1-1/2"
	60-13	11-1/2"	1-1/2"	UPS40-160/2 ¹	11-1/2"	1-1/2"
	60-14	11-1/2"	2"	UPS50-80/2 ¹	11-1/2"	2"
	60-15	13-1/2"	1-1/2"	UPS32-160/2	13-1/2"	3/4" to 1-1/2"
60-16	13-1/2"	1-1/2"	UPS32-160/2	13-1/2"	3/4" to 1-1/2"	
60-17	13-1/2"	1-1/2"	UPS40-240/2	13-1/2"	1-1/2"	
60-19	14"	2"	UPS50-160/2	14"	2"	
60-20	14"	2"	UPS50-160/2	14"	2"	
60-21	14"	2"	UPS50-240/2	14"	2"	
TACO	120	11"	2"	UPS32-40/4 ^{1,2}	11"	3/4" to 1-1/2"
	131	13-5/8"	3"	UP53-45F ^{1,2}	10"	2"
	133	13-5/8"	3"	UPS53-55/57 ^{1,2}	11-7/8"	3"
	1600	10-1/4"	1-1/2"	UPS32-80/2 ¹	11"	1-1/2"
	1610	10-1/4"	1-1/2"	UPS32-80/2 ¹	11"	1-1/2"
	1612	13-1/2"	1-1/2"	UPS32-160/2 ¹	13-1/2"	1-1/2"
	1614	13-1/2"	1-1/2"	UPS32-160/2 ¹	13-1/2"	1-1/2"
	1616	14-1/2"	2"	UPS40-240/2 ^{1,2}	13-1/2"	1-1/2"
	1630	13-1/2"	2"	UPS50-80/4 ^{1,2}	11-1/2"	2"
	1632	13-1/2"	2"	UPS50-160/2 ¹	14"	2"
	1634	13-1/2"	2"	UPS50-160/2 ¹	14"	2"
	1636	16-1/2"	2"	UPS50-240/2 ^{1,2}	14"	2"
	1638	16-1/2"	2"	UPS50-240/2 ^{1,2}	14"	2"

PUMP CROSS REFERENCE GUIDE

Manufacturer	Model	Port to Port Length	Flange Size	Grundfos Model	Port to Port Length	Flange Size
ARMSTRONG	ARMflo E21	8-1/2"	1-1/2"	UP43-110F	8-1/2"	1-1/2"
	ARMflo E23	8-1/2"	1-1/2"	UP43-110F	8-1/2"	1-1/2"
	S 45	10"	2-1/2" - 3"	UP53-45F ¹	9-7/8"	2" - 2-1/2" - 3"
	S 46	10"	2-1/2" - 3"	UP53-46F ¹	9-7/8"	2" - 2-1/2" - 3"
	S 55	12"	3"	UPS53-55/57F ¹	11-7/8"	2" - 2-1/2" - 3"
	S 57	12"	3"	UPS53-55/57F ¹	11-7/8"	2" - 2-1/2" - 3"
	S 69	14-1/4"	3"	UPS75-69F ¹	14"	2" - 2-1/2" - 3"
	H51	11-1/2"	1"	UPS32-80/2 ^{1,2}	11"	2" - 2-1/2" - 3"
	H52	11-1/2"	1"	UPS32-80/2 ^{1,2}	11"	3/4" to 1-1/2"
	H53	11-1/2"	1-1/2"	UPS40-160/2 ¹	11-1/2"	1-1/2"
	H54	11-1/2"	2"	UPS50-80/2 ¹	11-1/2"	2-1/2"
	H63	13-1/2"	1-1/2"	UPS32-160/2 ¹	13-1/2"	1-1/2"
	H64	13-1/2"	1-1/2"	UPS32-160/2 ¹	13-1/2"	1-1/2"
	H65	13-1/2"	1-1/2"	UPS40-240/2 ¹	13-1/2"	1-1/2"
	H66	14"	2"	UPS50-160/2 ¹	14"	2"
	H67	14"	2"	UPS50-160/2 ¹	14"	2"
	H68	14"	2"	UPS50-240/2 ¹	14"	2"
	1050 1B (1/4 HP)	11-1/2"	1"	UPS32-80/2 ^{1,2}	11"	3/4" to 1-1/2"
	1050 1-1/4B (1/4 HP)	11-1/2"	1-1/4"	UPS32-80/2 ^{1,2}	11"	3/4" to 1-1/2"
	1050 1-1/2B (1/4 HP)	11-1/2"	1-1/2"	UPS32-80/2 ^{1,2}	11"	3/4" to 1-1/2"
	1050 2B (1/3 HP)	11-1/2"	2"	UPS50-80/4 ¹	11-1/2"	2"
	1050 2B (1/2 HP)	11-1/2"	2"	UPS50-80/4 ¹	11-1/2"	2"
	1050 2B (3/4 HP)	11-1/2"	2"	UPS50-80/4 ¹	11-1/2"	2"
	1060 1-1/2D (1/2 HP)	13-1/2"	1-1/2"	UPS32-160/2 ¹	13-1/2"	1-1/2"
	1060 1-1/2D (3/4 HP)	13-1/2"	1-1/2"	UPS32-160/2 ¹	13-1/2"	1-1/2"
	1060 1-1/2D (1-1/2 HP)	13-1/2"	1-1/2"	UPS40-240/2 ¹	13-1/2"	1-1/2"
	1060 2D (3/4 HP)	14"	2"	UPS50-160/2 ¹	14"	2"
	1060 2D (1 HP)	14"	2"	UPS50-160/2 ¹	14"	2"
	1060 2D (1-1/2 HP)	14"	2"	UPS50-160/2 ¹	14"	2"
	1060 2D (2 HP)	14"	2"	UPS50-240/2 ¹	14"	2"

¹Bronze version to be used in open systems.

²Replacement model requires piping and/or flange modification.



INCORRECT



Are you sure your pump's electrical connections are correct?

With Grundfos' VersaFlo® UPS, the red indicator light on the terminal box tells you the pump is rotating incorrectly.

CORRECT

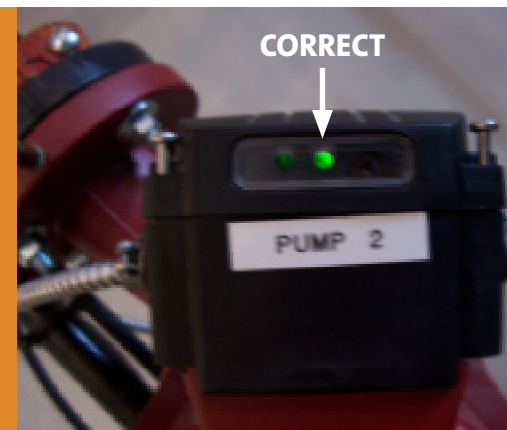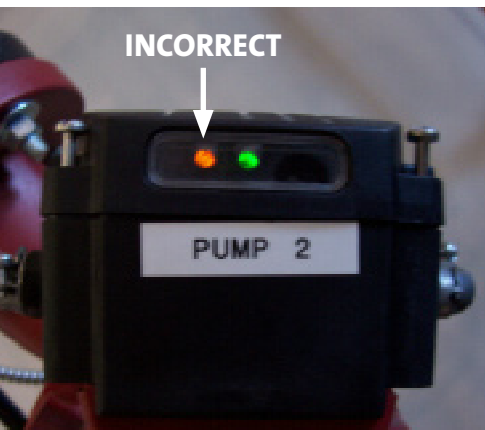

GLOBAL IMPACT

Grundfos Pumps is a global enterprise with more than 14,000 employees and more than 60 sister companies worldwide. As one of the world's leading pump manufacturers, Grundfos produces more than 10 million pump units annually and specializes in pioneering innovative pumping solutions. Grundfos has a track record of more than 25 years in the U.S. commercial market for wet rotor circulators.

MANUFACTURING STANDARDS

As one of the world's leading suppliers of pump technology, Grundfos has a major influence on the levels of manufacturing standards and operating efficiency that can be achieved with pumps.

Grundfos' manufacturing facilities throughout the world are certified to ISO 9000 standard or higher. Grundfos pumps are exhaustively checked and tested prior to dispatch, and all manufacturing data is fully accessible.

These standards are what allows us to provide customers with efficient, reliable solutions throughout the entire spectrum of heating and air-conditioning systems and in the transfer of fluids used in industrial processes.

RELIABILITY AND EFFICIENCY

Grundfos solutions meet – and often surpass – virtually all customer requirements for reliability and efficiency, from pumps and pump configurations that extend over the entire size range to the control systems and software.

Our pumps are backed by exceptional customer service and support essential for achieving peak reliability and efficiency. It's our guarantee.

L-UPS-SL-01 03/07 (US)
Subject to alterations

U.S.A.
GRUNDFOS Pumps Corporation
17100 West 118th Terrace
Olathe, Kansas 66061
Phone: (913) 227-3400
Telefax: (913) 227-3500

Canada
GRUNDFOS Canada Inc.
2941 Brighton Road
Oakville, Ontario
L6H 6C9
Phone: (905) 829-9533
Telefax: (905) 829-9512

Mexico
Bombas GRUNDFOS de Mexico S.A. de C.V.
Boulevard TLC No. 15
Parque Industrial Stiva Aeropuerto
C.P. 66600 Apodaca, N.L. Mexico
Phone: 011-52-81-8144 4000
Telefax: 011-52-81-8144 4010